

Features

- Improved sound quality
- Better intelligibility and less background sound
- Position close to the mouth with the flexible neck
- Solid construction


Technical data

Microphone type	: Electret
Directivity	: Unidirectional (Kidney shaped)
Frequency range	: 300Hz - 12kHz
Sensitivity	: -65+/-2dB (0dB=1V μ Bar, 1KHz VCC=1,5V, RL=680)
Impedance	: 1600 Ohm +/- 20%
S/N ratio	: 40dB or more
Operating voltage	: 1,5V - 10V
Current drain	: 0,4mA max.
Max. input sound pressure	: 120dB SPL
Cable	: 6m Shielded
Connector	: 2,5mm plug

Contents

- Gooseneck Microphone
- Mount-plate
- Screws : 2x parker 4x20mm & 1x screw 6x24mm
- ABS cover for base
- Windcover for microphone

Product dimensions

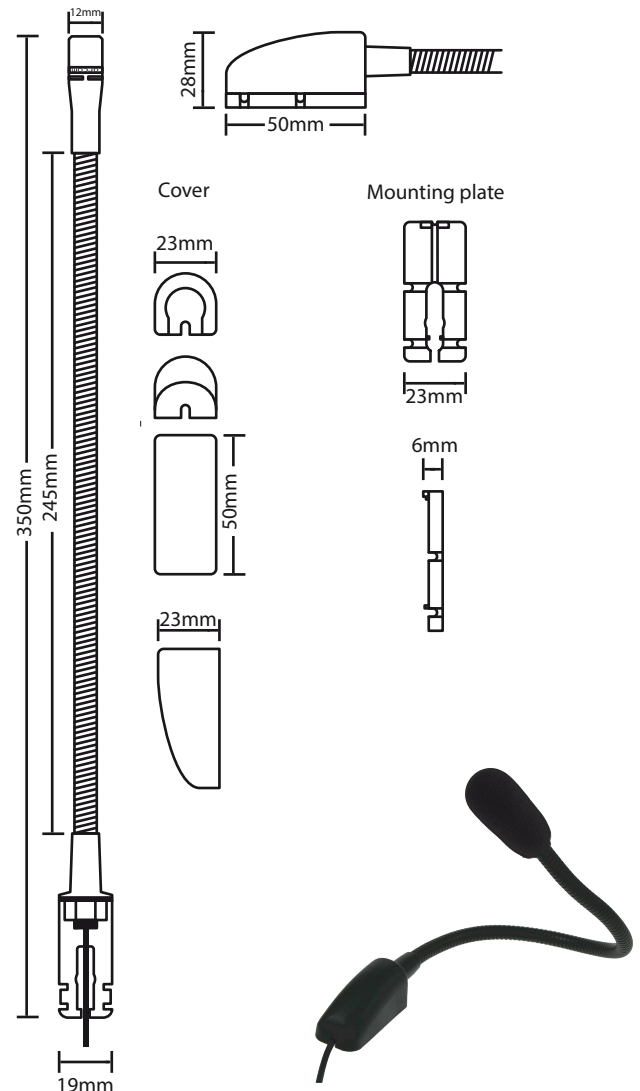

Typical frequency response curve

